

AD-A048 167

WEIDLINGER ASSOCIATES NEW YORK
TRANSIENT RESPONSE OF SHELLS WITH INTERNALLY ATTACHED STRUCTURE--ETC(U)
AUG 77 D RANLET, F L DIMAGGIO
TR-21

F/G 13/13

N00014-72-C-0119

NL

UNCLASSIFIED

1 of 1


ADA048 167



END
DATE
FILMED

1-78

DDC

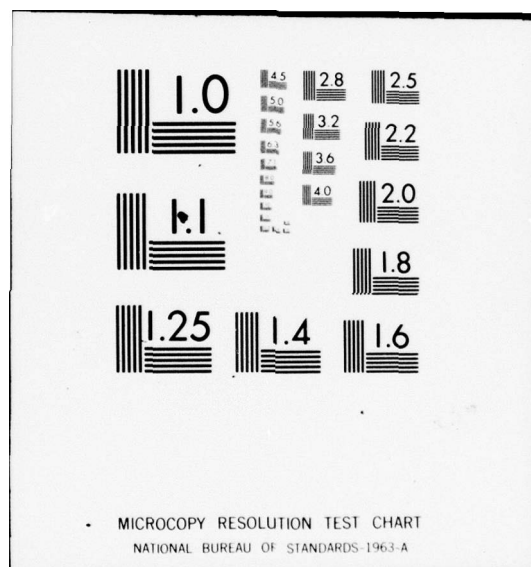

ADA048167

ABSTRACT

Equations of motion are derived for the transient response, to shock wave, of a submerged shell with internal structures. A substructuring procedure, which does not require calculation of a system stiffness matrix, is employed to obtain these equations in a general manner for arbitrary internal structures approximated by finite elements.

ABSTRACT IN	
Write Section	<input checked="" type="checkbox"/>
Self Section	<input type="checkbox"/>
Other	<input type="checkbox"/>
DISTRIBUTION/AVAILABILITY ORDER	
AVAIL. AND OR SECURITY	
A	

DDC
RECEIVED
JAN 9 1978
A

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

TABLE OF CONTENTS

	<u>Page</u>
I INTRODUCTION	1
II GENERAL KINEMATICS	2
III EQUATIONS OF MOTION OF SHELL	9
IV EQUATIONS OF MOTION OF SUBSTRUCTURE	13
V CONCLUDING REMARKS	15
REFERENCES	17
FIGURES	18
APPENDIX	21

I INTRODUCTION

In an earlier paper (Ref. [1]), equations of motion for the transient response, to a shock wave, of a submerged shell with internally attached structures were obtained by a substructuring procedure. Several quantities in these equations, relating to the attachments, were only broadly defined, and determined in detail only in an ad hoc manner for specific appendages. In this report, matrix expressions for these quantities are defined which permit their computation for arbitrary internal structures approximated by finite elements.

The present report addresses the same basic problem as Ref. [1], but does not consider the details of the fluid loading on the shell, which may be found in Ref. [1]. The effects of external loads applied to the internal structures, which were not considered in Ref. [1], are included here.

The substructuring procedure described herein is intended for use in transient response problems. Unlike many other substructuring schemes, which are used primarily to solve steady-state problems (see, e.g., Ref. [2]), the present method does not involve the modes and natural frequencies of the combined system (shell and appendages). In addition, a system stiffness matrix is not required, since the present technique employs the interaction forces and moments at the junctions of the shell and the attached structures.

II GENERAL KINEMATICS

Consider a shell S of arbitrary geometry (see Fig. 1). Let n , 2 and 3 denote mutually perpendicular directions, respectively normal and tangent to the middle surface of the shell. If d_n , d_2 and d_3 denote corresponding displacement components of this surface, a 3 by 1 displacement matrix $\underline{d}(s, t)$ may be defined, in which s denotes an arbitrary point on the middle surface, t is time, and underlining indicates a matrix; d_n is assumed positive inward. Corresponding to this displacement matrix, the 3 by 1 j th shell mode $\underline{\phi}_j(s)$ has components ϕ_j^n , ϕ_j^2 and ϕ_j^3 , with which are associated a natural frequency ω_j and a generalized mass

$$\mu_j = \int_A m \underline{\phi}_j^T \underline{\phi}_j dA \quad (1)$$

in which m denotes the mass per unit of surface area A of the middle surface of the shell and the superscript T denotes a transpose. The shell modes, which satisfy the orthogonality condition

$$\int_A m \underline{\phi}_k^T \underline{\phi}_j dA = 0 \quad \text{if } k \neq j \quad (2)$$

may be used as expansion functions for the shell displacements, i.e.,

$$\underline{d}(s, t) = \sum_{k=1}^{v_S} q_{Sk}(t) \underline{\phi}_k(s) \quad (3)$$

in which the $q_{Sk}(t)$ are generalized coordinates for the shell and v_S is the number of modes of the shell considered.

Assume that an elastic structure σ , entirely within the shell S , is attached to S at points s_I ($I = 1, 2, \dots, N_A$), as shown in Fig. 2. Let σ be approximated by finite elements with interface (attached) nodal points I , coinciding with s_I , and interior (unattached) nodal points α ($\alpha = 1, 2, \dots, N_U$), corresponding

to material points of σ not in contact with S . The finite element representation of σ is assumed to include rotational degrees of freedom.

At each interface point I , certain components of displacement and/or rotation of σ must match corresponding quantities of S , depending on the type of support. Thus, at an interface point I , define the vector

$$\underline{\bar{X}}_{\sigma I}^A = \begin{bmatrix} \underline{\bar{X}}_{\sigma I} \\ \underline{\hat{X}}_{\sigma I} \end{bmatrix} \quad (4)$$

where the upper partition, an \bar{N}_I by 1 matrix, contains those physical degrees of freedom of σ which must match corresponding physical degrees of freedom of S , and the lower partition, an \hat{N}_I by 1 matrix, contains the remaining physical degrees of freedom of σ active at interface point I .*)

Since the interior points of σ are not connected to S , define the vector of physical degrees of freedom of σ at an interior point α as

$$\underline{\bar{X}}_{\sigma \alpha}^U = \underline{\hat{X}}_{\sigma \alpha} \quad (5)$$

It may be observed in Eqs. (4) and (5), and in what follows, that the symbol $\bar{}$ above a quantity indicates a quantity associated with physical degrees of freedom of σ constrained to move with S , while the symbol $\hat{}$ above a quantity indicates a quantity associated with physical degrees of freedom of σ not

*)

At a simple support, e.g., the displacements of σ and S must be equal, but the rotations of σ and S are not equal. Thus, assuming two active physical degrees of freedom, the displacement of σ is located in the upper partition of Eq. (4), and the rotation of σ is located in the lower partition of Eq. (4).

constrained to move with S.

If the appropriate definitions of Eqs. (4) and (5) are applied to all nodal points of σ , the physical degrees of freedom of σ may be arranged in the form

$$\underline{X}_{\sigma} = \begin{bmatrix} \bar{\underline{X}}_{\sigma} \\ \hat{\underline{X}}_{\sigma} \end{bmatrix} \quad (6)$$

in which the upper partition, an \bar{N} by 1 matrix, contains the $\bar{\underline{X}}_{\sigma I}$ terms from all interface points [Eq. (4)] and the lower partition, an \hat{N} by 1 matrix, contains the $\hat{\underline{X}}_{\sigma I}$ terms from all interface points [Eq. (4)] and the $\hat{\underline{X}}_{\sigma \alpha}$ terms from all interior points [Eq. (5)].

In the sequel, the elements in the upper partition of Eq. (6) will be referred to as "constrained physical degrees of freedom of σ ", while the elements in the lower partition will be referred to as "unconstrained physical degrees of freedom of σ ". The matrix \underline{X}_{σ} has size N by 1, where

$$N = \bar{N} + \hat{N} \quad (7)$$

is the total number of active physical degrees of freedom of σ .

From Eq. (3), the shell displacements at an interface point I may be written as

$$\underline{d}(s_I, t) \equiv \underline{d}_I = \sum_{k=1}^{v_S} q_{Sk}(t) \underline{\phi}_k(s_I) \equiv \underline{\phi}_I q_S \quad (8)$$

where $\underline{\phi}_I$ is a 3 by v_S matrix with elements $\underline{\phi}_k(s_I)$ and q_S is a v_S by 1 matrix containing the generalized coordinates of the shell. Similarly, the rotations of the shell cross section at an interface point I may be expressed as

$$\underline{\beta}_I \equiv \sum_{k=1}^{v_S} q_{Sk}(t) \underline{\phi}_k^R(s_I) \equiv \underline{\phi}_I^R q_S \quad (9)$$

in which $\phi_k^R(s_I)$ denotes the 3 by 1 matrix of rotations about the n, 2 and 3 axes in the mode ϕ_k and ϕ_I^R is a 3 by v_S matrix with elements $\phi_k^R(s_I)$.

Continuity of appropriate components of displacement and rotation of shell and substructure at an interface point I requires that

$$\bar{X}_{\sigma I} = \underline{D}_I \begin{bmatrix} \underline{d}_I \\ \underline{\beta}_I \end{bmatrix} \quad (10)$$

where \underline{D}_I , an \bar{N}_I by 6 matrix, is a local rotational coordinate transformation which transforms quantities expressed in the S-coordinate system into the σ -coordinate system. Each row of \underline{D}_I contains at most three non-zero terms. *) Use of Eqs. (8) and (9) permits Eq. (10) to be written in the form

$$\bar{X}_{\sigma I} = \underline{C}_I \underline{q}_S \quad (11)$$

where \underline{C}_I is an \bar{N}_I by v_S matrix given by

$$\underline{C}_I = \underline{D}_I \begin{bmatrix} \underline{\phi}_I \\ \underline{\phi}_I^R \end{bmatrix} \quad (12)$$

Application of Eq. (11) to all interface points, with reference to Eq. (6) for proper ordering, permits the continuity between shell and substructure to be written as

$$\bar{X}_{\sigma} = \underline{C} \underline{q}_S \quad (13)$$

in which \underline{C} is an \bar{N} by v_S matrix having the form

*) The coordinate transformation array in Eq. (10) is used for convenience in presentation. Actually, only a 3 by 3 coordinate transformation array is required at each interface point, the rows of this array applying to both displacements and rotations.

$$\underline{C} = \begin{bmatrix} \underline{C}_1 \\ \vdots \\ \underline{C}_I \\ \vdots \\ \underline{C}_{N_A} \end{bmatrix} \quad (14)$$

Equation (13) expresses the constrained physical degrees of freedom of σ in terms of the free-free modes of S .*)

As suggested in Ref. [3], the response of σ may be taken as the superposition of its static response to the actual motion of its supports and the dynamic response with respect to fixed supports, i.e.**) ,

$$\hat{\underline{X}}_{\sigma} = \hat{\underline{\phi}}_{\sigma} \underline{q}_{\sigma} + \hat{\underline{g}} \bar{\underline{X}}_{\sigma} \quad (15)$$

In Eq. (15), $\hat{\underline{\phi}}_{\sigma}$ is the \hat{N} by v_{σ} fixed modal matrix, where v_{σ} denotes the number of fixed-base modes, and \underline{q}_{σ} is the v_{σ} by 1 matrix of corresponding generalized coordinates. The \hat{N} by \bar{N} matrix $\hat{\underline{g}}$ is obtained by considering the static response of σ to an arbitrary support motion (support "settlement") when the nodal loads corresponding to the unconstrained physical degrees of freedom vanish. In such a case, Eq. (15) becomes

$$(\hat{\underline{X}}_{\sigma})_{\text{static}} = \hat{\underline{g}} (\bar{\underline{X}}_{\sigma})_{\text{static}} \quad (16)$$

*) Equation (13) replaces Eq. (5) of Ref. [1]:

$$\underline{d}_{\sigma}(s_j, t) = \underline{d}(s_j, t)$$

**) Equation (15) replaces Eq. (4) of Ref. [1]:

$$\underline{d}_{\sigma}(s, t) = \sum_i \underline{q}_{\sigma i}(t) \underline{\phi}_{\sigma i}(s) + \underline{g}(s, t)$$

As shown in Ref. [2], the matrix $\hat{\underline{g}}$ (sometimes termed the "constraint modes") may be obtained by considering the linear static "force-displacement" relation for σ :

$$\underline{K}(\underline{X}_\sigma)_{\text{static}} = \underline{R} \quad (17)$$

in which \underline{K} is the N by N unconstrained stiffness matrix for the substructure and \underline{R} is the corresponding vector of nodal forces and moments. For the determination of $\hat{\underline{g}}$, Eq. (17) may be partitioned to correspond to Eq. (6), yielding

$$\begin{bmatrix} \underline{k}_{11} & \underline{k}_{12} \\ \underline{k}_{21} & \underline{k}_{22} \end{bmatrix} \begin{bmatrix} \bar{\underline{X}}_\sigma \\ \hat{\underline{X}}_\sigma \end{bmatrix}_{\text{static}} = \begin{bmatrix} \underline{R} \\ \underline{0} \end{bmatrix} \quad (18)$$

since the only nodal loads are the reactions. It then follows from the lower partition of Eq. (18) that

$$(\hat{\underline{X}}_\sigma)_{\text{static}} = -\underline{k}_{22}^{-1} \underline{k}_{21} (\bar{\underline{X}}_\sigma)_{\text{static}} \quad (19)$$

where the superscript -1 indicates an inverse. A comparison of Eqs. (19) and (16) shows that

$$\hat{\underline{g}} = -\underline{k}_{22}^{-1} \underline{k}_{21} \quad (20)$$

Thus, the elements of $\hat{\underline{g}}$ are the static displacements and rotations (including rigid-body motion), corresponding to the unconstrained physical degrees of freedom of σ , which result from successive unit displacements and rotations, corresponding to the constrained physical degrees of freedom of σ , at attachment points I when all other constrained physical degrees of freedom of σ are set equal to zero.

The use of Eq. (13) permits Eq. (15) to be written as

$$\hat{\underline{X}}_\sigma = \hat{\underline{\phi}}_\sigma \underline{q}_\sigma + \hat{\underline{g}} \underline{C} \underline{q}_s \quad (21)$$

As suggested in Ref. [2], Eqs. (13) and (21) may be combined into the single matrix equation

$$\underline{X}_O = \underline{T}^C \underline{q} \quad (22)$$

in which \underline{X}_O is given by Eq. (6), the transformation matrix \underline{T}^C has the form

$$\underline{T}^C = \left[\begin{array}{c|c} \underline{C} & \underline{0} \\ \hline \hat{\underline{B}} \underline{C} & \hat{\underline{\Phi}}_O \end{array} \right] \quad (23)$$

and the array of generalized coordinates is given by

$$\underline{q} = \left[\begin{array}{c} \underline{q}_S \\ \hline \underline{q}_O \end{array} \right] \quad (24)$$

In Eq. (22), \underline{X}_O is an N by 1 matrix, \underline{q} is a ν by 1 matrix, with

$$\nu = \nu_S + \nu_O \quad (25)$$

and \underline{T}^C is an N by ν matrix. Equation (22) may be written in subscript notation as

$$X_{Ok} = \sum_{j=1}^{\nu} T_{kj}^C q_j \quad (k = 1, 2, \dots, N) \quad (26)$$

III EQUATIONS OF MOTION OF SHELL

The kinetic and potential energies of the combination of shell S and internal structure σ may be written as

$$T = \frac{1}{2} \sum_{j=1}^{v_S} \mu_j \dot{q}_{Sj}^2 + \frac{1}{2} \sum_{j=1}^N M_j \dot{X}_{\sigma j}^2 \quad (27)$$

$$V = \frac{1}{2} \sum_{j=1}^{v_S} \mu_j \omega_j^2 q_{Sj}^2 + \frac{1}{2} \sum_{j=1}^N \sum_{k=1}^N K_{jk} X_{\sigma j} X_{\sigma k} \quad (28)$$

in which the $X_{\sigma j}$ are given by Eq. (26), the K_{jk} are the elements of the partitioned stiffness matrix of Eqs. (17) and (18), and the M_j are the elements of the partitioned mass matrix of σ from an assumed lumped mass formulation^{*}). The mass matrix must be partitioned to correspond to Eq. (6), i.e.,

$$\underline{M} = \begin{bmatrix} \underline{m}_{11} & \underline{0} \\ \underline{0} & \underline{m}_{22} \end{bmatrix} \quad (29)$$

where the upper left partition, an \bar{N} by \bar{N} matrix, and the lower right partition, an \hat{N} by \hat{N} matrix, are diagonal.

The equations of motion of the shell may be derived from Lagrange's equations:

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{q}_{Sj}} \right) + \frac{\partial V}{\partial q_{Sj}} = Q_{Tj} + \hat{Q}_{Sj} \quad (j = 1, 2, \dots, v_S) \quad (30)$$

^{*}) If Eq. (26) is substituted into Eqs. (27) and (28), one obtains the equations which replace Eqs. (6) and (7) of Ref. [1]:

$$T(\dot{q}_{Sj}, \dot{q}_{\sigma j}) = \frac{1}{2} \sum_i \mu_i \dot{q}_{Si}^2 + T_{\sigma}(\dot{q}_{\sigma j}, \dot{q}_{Sj})$$

$$V(q_{Sj}, q_{\sigma j}) = \frac{1}{2} \sum_i \mu_i \omega_i^2 q_{Si}^2 + V_{\sigma}(q_{\sigma j}, q_{Sj})$$

in which the Q_{Tj} are the generalized forces corresponding to the total fluid pressure p_T acting on the surface of the shell (see Fig. 1) and the \hat{Q}_{Sj} are the generalized forces from the action of σ on S , exclusive of the contribution derivable from the kinetic and potential energies. As shown in the Appendix, the \hat{Q}_{Sj} are the elements of the matrix

$$\hat{Q}_S = \underline{C}^T \underline{g}^T \hat{R} \quad (31)$$

where \hat{R} , an N by 1 matrix, is the vector of known applied nodal loads acting on σ (see Fig. 2).

It follows from Eqs. (26) and (24) that

$$\frac{\partial \dot{X}_{\sigma k}}{\partial \dot{q}_{Sj}} = \frac{\partial \dot{X}_{\sigma k}}{\partial \dot{q}_{Sj}} = T_{kj}^C \quad \begin{matrix} (j = 1, 2, \dots, v_S; \\ k = 1, 2, \dots, N) \end{matrix} \quad (32)$$

which may be seen to reference terms in the upper and lower left partitions of Eq. (23). Thus, the use of Eqs. (27), (28), and (32) leads to

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{q}_{Sj}} \right) = \mu_j \ddot{q}_{Sj} + \sum_{k=1}^N T_{kj}^C M_k \ddot{X}_{\sigma k} \quad (33)$$

$$\frac{\partial V}{\partial q_{Sj}} = \mu_j \omega_j^2 q_{Sj} + \sum_{k=1}^N T_{kj}^C \sum_{i=1}^N K_{ki} X_{\sigma i} \quad (34)$$

The substitution of Eqs. (31), (33), and (34) into Eq. (30), with reference to Eqs. (18), (23), and (29), results in

$$\mu_j \ddot{q}_{Sj} + \mu_j \omega_j^2 q_{Sj} = Q_{Tj} - P_j \quad (j = 1, 2, \dots, v_S) \quad (35)$$

where the P_j are the elements of the vector

$$\underline{P} = \underline{\bar{P}} + \underline{\hat{P}} \quad (36)$$

whose addends are defined as

$$\bar{P} = \underline{C}^T [\underline{m}_{11} \ddot{\bar{X}}_{\sigma} + \underline{k}_{11} \bar{X}_{\sigma} + \underline{k}_{12} \hat{X}_{\sigma}] \quad (37)$$

$$\hat{P} = \underline{C}^T \hat{g}^T [\underline{m}_{22} \ddot{\bar{X}}_{\sigma} + \underline{k}_{21} \bar{X}_{\sigma} + \underline{k}_{22} \hat{X}_{\sigma} - \hat{R}] \quad (38)$$

The bracketed term in Eq. (38) may be recognized as the physical equations of motion of σ . Hence, the contribution of Eq. (38) vanishes, and the equations of motion of S become

$$\mu_j \ddot{q}_{Sj} + \mu_j \omega_j^2 q_{Sj} = Q_{Tj} + Q_{\sigma j} \quad (39)$$

in which the generalized forces $Q_{\sigma j}$, corresponding to the forces and moments exerted by σ on S, are

$$Q_{\sigma j} = - \sum_{k=1}^{\bar{N}} C_{kj} (M_k \ddot{X}_{\sigma k} + \sum_{i=1}^N K_{ki} X_{\sigma i}) \quad (40)$$

which result from the dynamic reactions

$$R_{\sigma k} = -(M_k \ddot{X}_{\sigma k} + \sum_{i=1}^N K_{ki} X_{\sigma i}) \quad (41)$$

exerted by σ on S^{*)}.

Using Eqs. (22) to (24), the equations of motion of S may now be written in the form

*) Equations (40) and (41) are generalizations of specific examples given by Eqs. (17), (18); (22), (23); (A1), (A2); and (A12), (A13), (A16) of Ref. [1].

$$\sum_{k=1}^{v_S} (\mu_k \delta_{jk} + \sum_{i=1}^{\bar{N}} C_{ij} M_i C_{ik}) \ddot{q}_{Sk} + \mu_j \omega_j^2 q_{Sj} = Q_{Tj} - \sum_{i=1}^{\bar{N}} C_{ij} F_i \quad (j = 1, 2, \dots, v_S) \quad (42)$$

where δ_{jk} is the Kronecker delta and the F_i , the elastic forces and moments exerted by σ on S and vice-versa, are the elements of the \bar{N} by 1 matrix

$$\underline{F} = (\underline{k}_{11} + \underline{k}_{12} \hat{g}) \underline{C} q_S + \underline{k}_{12} \hat{\phi}_\sigma q_\sigma \quad (43)$$

The effect of inertia forces appears in the double summation in Eq. (42)

It may be observed that the equations of motion of the shell have stiffness coupling only between shell and substructure.

In the equations of motion of the shell, the contributions of the inertia forces and the elastic reactions of σ on S may be given a simple physical interpretation by referring to Fig. 3. Figure 3a shows an idealized finite element model of a substructure σ attached to a shell S , and Figs. 3b and 3c show the manner in which Eqs. (42) and (43) treat the connection of σ to S . The effect of inertia forces results from the rigidly attached point mass of Fig. 3b, while the effect of the elastic reactions of σ on S results from the "spring force" of Fig. 3c.

IV EQUATIONS OF MOTION OF SUBSTRUCTURE

The equations of motion of the substructure σ may be obtained from Lagrange's equations:

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{q}_{\sigma j}} \right) + \frac{\partial V}{\partial q_{\sigma j}} = \hat{Q}_{\sigma j} \quad (j = 1, 2, \dots, v_{\sigma}) \quad (44)$$

in which the $\hat{Q}_{\sigma j}$ are the generalized forces corresponding to the known applied nodal loads acting on σ . As shown in the Appendix, the $\hat{Q}_{\sigma j}$ are the elements of the matrix

$$\hat{\underline{Q}}_{\sigma} = \hat{\underline{\Phi}}_{\sigma}^T \hat{\underline{R}} \quad (45)$$

It follows from Eqs. (26) and (24) that

$$\frac{\partial X_{\sigma k}}{\partial q_{\sigma j}} = \frac{\partial \dot{X}_{\sigma k}}{\partial \dot{q}_{\sigma j}} = T_{k, j+v_s}^C \quad (j = 1, 2, \dots, v_{\sigma}; \quad k = 1, 2, \dots, N) \quad (46)$$

which may be seen to reference terms in the upper and lower right partitions of Eq. (23). Since the upper right partition of Eq. (23) is a null matrix, the use of Eqs. (27), (28), and (46) leads to

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{q}_{\sigma j}} \right) = \sum_{k=1}^{\hat{N}} \hat{\phi}_{\sigma k j} M_{k+\bar{N}} \ddot{X}_{\sigma k+\bar{N}} \quad (47)$$

$$\frac{\partial V}{\partial q_{\sigma j}} = \sum_{k=1}^{\hat{N}} \hat{\phi}_{\sigma k j} \sum_{i=1}^N K_{k+\bar{N}, i} X_{\sigma i} \quad (48)$$

The substitution of Eqs. (45), (47), and (48) into Eq. (44) results in

$$\sum_{k=1}^{\hat{N}} \hat{\phi}_{\sigma k j} (M_{k+\bar{N}} \ddot{X}_{\sigma k+\bar{N}} + \sum_{i=1}^N K_{k+\bar{N}, i} X_{\sigma i} - \hat{R}_k) = 0 \quad (49)$$

which may be written in matrix form as

$$\hat{\underline{\Phi}}_{\sigma}^T \begin{bmatrix} \underline{0} & \underline{m}_{22} \end{bmatrix} \begin{bmatrix} \ddot{\underline{\bar{X}}}_{\sigma} \\ \underline{\hat{X}}_{\sigma} \end{bmatrix} + \hat{\underline{\Phi}}_{\sigma}^T \begin{bmatrix} \underline{k}_{21} & \underline{k}_{22} \end{bmatrix} \begin{bmatrix} \underline{\bar{X}}_{\sigma} \\ \underline{\hat{X}}_{\sigma} \end{bmatrix} = \hat{\underline{\Phi}}_{\sigma}^T \hat{\underline{R}} \quad (50)$$

If Eqs. (22) to (24) are substituted into Eq. (50), and the matrix products are carried out, there results

$$\begin{aligned} \hat{\phi}_\sigma^T \underline{m}_{22} \hat{\phi}_\sigma \ddot{\underline{q}}_\sigma + \hat{\phi}_\sigma^T \underline{k}_{22} \hat{\phi}_\sigma \underline{q}_\sigma + \hat{\phi}_\sigma^T (\underline{k}_{21} + \underline{k}_{22} \hat{\underline{g}}) \underline{C} \underline{q}_S \\ + \hat{\phi}_\sigma^T \underline{m}_{22} \hat{\underline{g}} \underline{C} \ddot{\underline{q}}_S = \hat{\phi}_\sigma^T \hat{\underline{R}} \end{aligned} \quad (51)$$

In view of Eq. (20), which defines the constraint modes, the third term of Eq. (51) vanishes. Moreover, as discussed in Ref. [2], the fixed-base modes of σ are the solutions of the eigenvalue problem

$$\underline{k}_{22} (\hat{\phi}_\sigma)_j = \omega_{\sigma j}^2 \underline{m}_{22} (\hat{\phi}_\sigma)_j \quad (52)$$

where $\omega_{\sigma j}$ is the natural frequency of the j th mode, and hence are orthogonal.

Thus, Eq. (51) may be simplified to yield the equations of motion of σ :

$$\underline{\mu}_\sigma \ddot{\underline{q}}_\sigma + \underline{\kappa}_\sigma \underline{q}_\sigma = \hat{\phi}_\sigma^T \hat{\underline{R}} - \underline{\mu}_\sigma \underline{G} \underline{C} \ddot{\underline{q}}_S \quad (53)$$

where $\underline{\mu}_\sigma$ and $\underline{\kappa}_\sigma$ are diagonal matrices whose main diagonal terms are, respectively, the generalized masses and generalized stiffnesses of σ , and

$$\underline{G} = \underline{\mu}_\sigma^{-1} \hat{\phi}_\sigma^T \underline{m}_{22} \hat{\underline{g}} \quad (54)$$

is a v_σ by \bar{N} matrix whose columns are the expansion coefficients of a modal series representation of the constraint modes. In subscript notation, Eq. (53) becomes^{*)}

$$\ddot{q}_{\sigma j} + \omega_{\sigma j}^2 q_{\sigma j} = \sum_{k=1}^{\bar{N}} \left[\frac{1}{\mu_{\sigma j}} \hat{\phi}_{\sigma k j} \hat{R}_k - G_{jk} \sum_{i=1}^{v_S} C_{ki} \ddot{q}_{Si} \right] \quad (j = 1, 2, \dots, v_\sigma) \quad (55)$$

It may be observed that the equations of motion of the substructure σ have inertia coupling only between shell and substructure.

*) Equation (55) may be recognized as a generalization of Eq. (A8) of Ref. [1].

V CONCLUDING REMARKS

The equations of motion for the transient response of a shell S with internal structure σ are given by Eqs. (42), (43), (53), and (54). It is important to note that no total system ($S + \sigma$) modal stiffness matrix is required in the present formulation, as is required when eigenvalues and eigenvectors for the entire system are sought (see, e.g., Ref. [2]). It should also be noted that, in view of the stiffness coupling between S and σ in Eqs. (42) and (43), the modal mass matrix to be inverted in the solution of a transient response problem has size v_S by v_S , determined solely by the number of modes of the shell employed in the solution. Formulations with inertia coupling between shell and substructure require the size of the modal mass matrix to be inverted to increase as the total number of modes v increases.

The physical stiffness and mass matrices of σ , \underline{K} and \underline{M} of Eqs. (18) and (29), respectively, may be obtained by modifying a finite element computer code such as SAPIV (Ref. [4]). The constraint modes may be determined by means of Eq. (20), or by utilizing a solution option available with SAPIV. Hence, it is possible to evaluate all of the matrices required in Eqs. (42) and (43) by using only those rows of \underline{K} and only those main diagonal terms of \underline{M} which correspond to the constrained physical degrees of freedom of σ . Once the expansion coefficients of the constraint modes [Eq. (54)] and the modal coefficients for the interaction forces and moments [Eq. (43)] have been evaluated, the constraint modes and the matrices \underline{K} and \underline{M} may be eliminated from the final form of the equations of motion of S and σ . This elimination and the absence of a system modal stiffness matrix will reduce the computer core (central memory) required to solve a given problem.

The present formulation will also reduce the amount of computer time (central processor time) required to set up the matrices in the equations of motion, as compared with that required by a method employing a system modal stiffness matrix. By way of example, if the formulation of Ref. [2] is used for a transient response problem, the matrices

$$\underline{K}^C = \underline{T}^{CT} \underline{K} \underline{T}^C \quad (56)$$

$$\underline{M}^C = \underline{T}^{CT} \underline{M} \underline{T}^C \quad (57)$$

must be evaluated. The computer time required to evaluate Eq. (56) may be excessive, especially if the problem under consideration requires many modes v and/or many physical degrees of freedom of σ , and if \underline{K} is not well banded. It should be pointed out that the rearrangement of physical degrees of freedom of σ to produce the partitioning of Eq. (18) usually results in a poorly banded matrix. For a lumped mass formulation, the computer time required to evaluate Eq. (57) is not significant compared with that needed to evaluate Eq. (56). Thus, a reduction in the amount of computer time required to set up the equations of motion is obtained by the elimination of a system modal stiffness matrix. A reduction in solution time is also quite probable.

The free-free modes of the shell S may be determined by means of a computer code such as BOSOR4 (Ref. [5]), while SAPIV may, of course, be used to obtain the fixed-base modes of the substructure σ . If a consistent mass formulation is desired for σ , the equations of Sections III and IV may be modified in a straightforward manner. However, in such a case, SAPIV, which is based on a lumped mass formulation, must be replaced by a computer code employing a consistent mass formulation. Although the equations derived in Sections III and IV deal with one piece of internal structure, the present method is easily extended to include any number of internal appendages.

REFERENCES

- [1] D. Ranlet, F.L. DiMaggio, H.H. Bleich and M.L. Baron, "Elastic Response of Submerged Shells with Internally Attached Structures to Shock Loading", International Journal of Computers and Structures, Vol. 7, No. 3, June 1977, pp. 355-364.
- [2] W.A. Benfield and R.F. Hruda, "Vibration Analysis of Structures by Component Mode Substitution", AIAA Journal, Vol. 9, No. 7, July 1971, pp. 1255-1261.
- [3] R.D. Mindlin and L.E. Goodman, "Beam Vibrations with Time-Dependent Boundary Conditions", Paper No. 49-A-19, presented at ASME Annual Meeting, New York, New York, November 27 - December 2, 1949.
- [4] K.J. Bathe, E.L. Wilson and F.E. Peterson, "SAPIV - A Structural Analysis Program for Static and Dynamic Response of Linear Systems", Report No. EERC 73-11, Earthquake Engineering Research Center, College of Engineering, University of California, Berkeley, California, April 1974.
- [5] D. Bushnell, "Stress, Stability and Vibration of Complex Branched Shells of Revolution: Analysis and User's Manual for BOSOR4", LMSC-D243605, Lockheed Missiles and Space Co., Inc., Sunnyvale, California, March 1972.

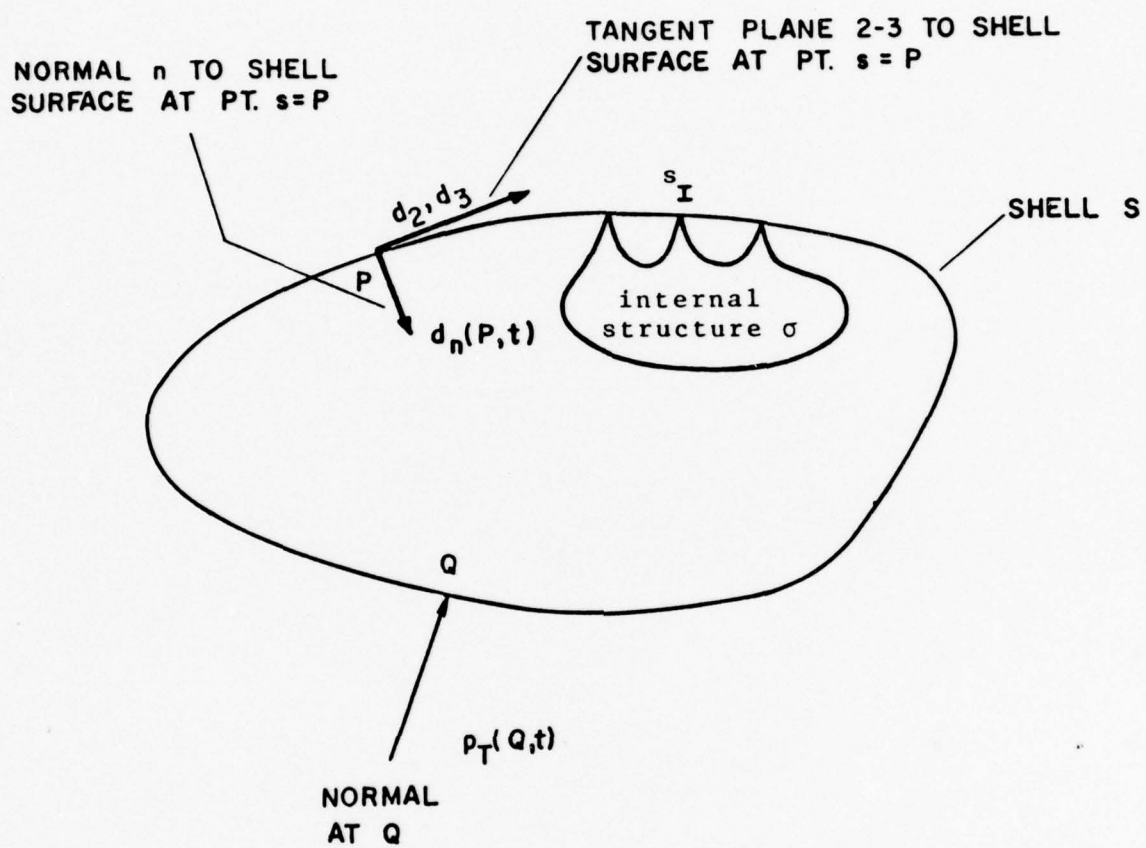


FIG. 1



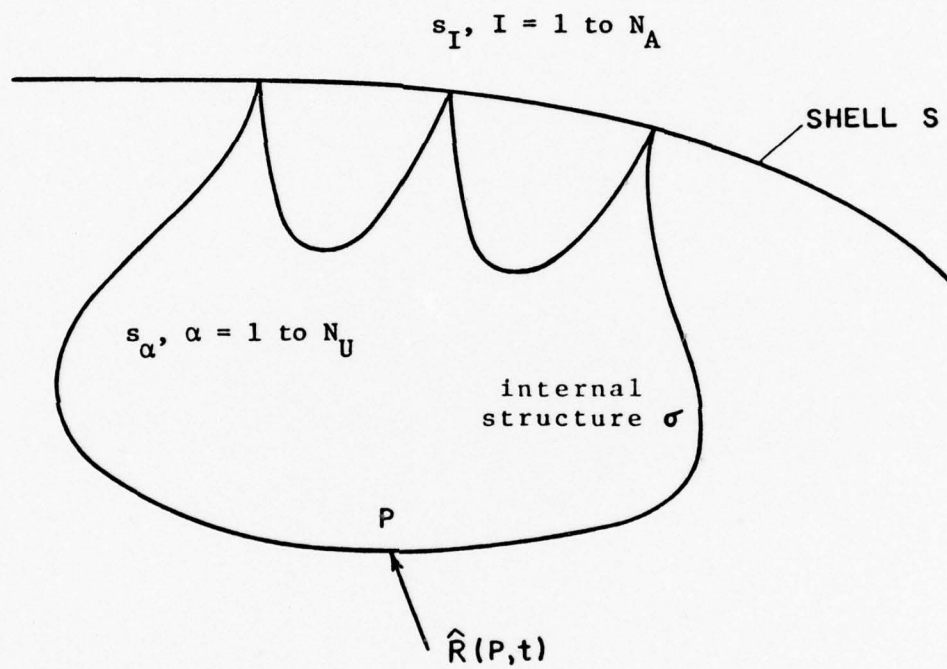



FIG. 2

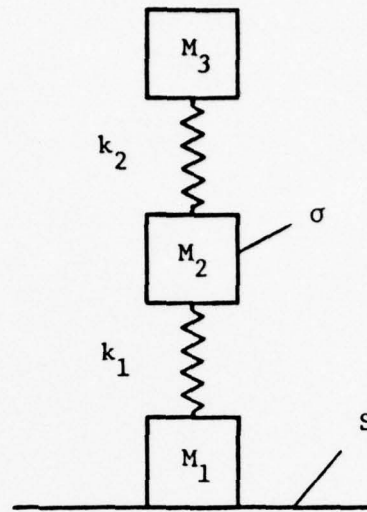

(a) SUBSTRUCTURE ATTACHED TO SHELL



(b) RIGIDLY ATTACHED MASS

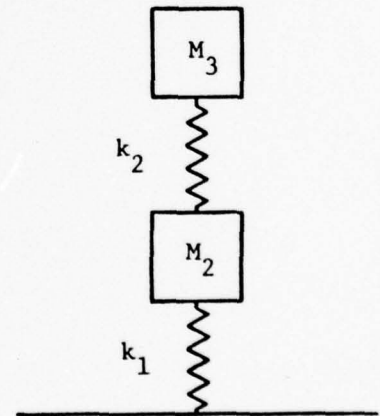

(c) ELASTIC REACTION

FIG. 3

APPENDIX - GENERALIZED FORCES DUE TO APPLIED LOADS ON SUBSTRUCTURE

The virtual work due to the known applied nodal loads on substructure σ may be written as

$$\delta W = (\delta \underline{\hat{X}}_{\sigma})^T \underline{\hat{R}} \quad (A1)$$

in which $\delta \underline{\hat{X}}_{\sigma}$ is the \hat{N} by 1 matrix of virtual displacements and $\underline{\hat{R}}$ is the \hat{N} by 1 matrix of applied loads. In Eq. (A1), both the virtual displacements and the applied loads correspond to the unconstrained physical degrees of freedom of σ . From Eq. (21), it follows that

$$\delta \underline{\hat{X}}_{\sigma} = \underline{\hat{\phi}}_{\sigma} \delta \underline{q}_{\sigma} + \underline{\hat{g}} \underline{C} \delta \underline{q}_S \quad (A2)$$

so that Eq. (A1) may be expressed as

$$\delta W = \delta \underline{q}_{\sigma}^T (\underline{\hat{\phi}}_{\sigma}^T \underline{\hat{R}}) + \delta \underline{q}_S^T (\underline{C}^T \underline{\hat{g}}^T \underline{\hat{R}}) \quad (A3)$$

The virtual work of Eq. (A1) may be written in terms of generalized forces as

$$\delta W = \delta \underline{q}^T \underline{\hat{Q}} \quad (A4)$$

where \underline{q} is given by Eq. (24) and

$$\underline{\hat{Q}} = \begin{bmatrix} \underline{\hat{Q}}_S \\ \underline{\hat{Q}}_{\sigma} \end{bmatrix} \quad (A5)$$

is a v by 1 matrix partitioned to correspond to Eq. (24). The use of Eqs. (24) and (A5) in Eq. (A4) results in

$$\delta W = \delta \underline{q}_S^T \underline{\hat{Q}}_S + \delta \underline{q}_{\sigma}^T \underline{\hat{Q}}_{\sigma} \quad (A6)$$

Since the variations of the generalized coordinates are arbitrary, a comparison of Eqs. (A3) and (A6) yields

$$\hat{\underline{Q}}_S = \underline{C}^T \underline{\hat{g}}^T \underline{\hat{R}} \quad (A7)$$

$$\hat{\underline{Q}}_\sigma = \underline{\hat{\phi}}_\sigma^T \underline{\hat{R}} \quad (A8)$$

The components of generalized force associated with the generalized coordinates of the shell S are given by Eq. (A7), and those associated with the generalized coordinates of the substructure σ are given by Eq. (A8).

PAGE 1

BEST AVAILABLE COPY

ASSISTANT TO THE SECRETARY DEFENSE
ATOMIC ENERGY
WASHINGTON, DC 20301
ATTN DONALD COTTER

DIRECTOR
DEFENSE ADVANCED RESEARCH PROJECT AGENCY
ARCHITECT BUILDING
1400 WILSON BLVD.
ARLINGTON, VA 22209
ATTN A. TACHMINDJI
ATTN STO KENT KRESA
ATTN TECHNICAL LIBRARY
ATTN R. CHAPMAN

DEFENSE DOCUMENTATION CENTER
CAMERON STATION
ALEXANDRIA, VA 22314
ATTN TECHNICAL LIBRARY

(3 COPIES

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
WASHINGTON, DC 20301
ATTN DI-7D E. OFARRELL
ATTN DI-7E
ATTN DT-1C J. VERONA
ATTN DT-2 (WEAPONS&SYSTEMS DIVISION)
ATTN TECHNICAL LIBRARY

DEFENSE NUCLEAR AGENCY
WASHINGTON, DC 20305
ATTN STTL TECHNICAL LIBRARY
ATTN STST ARCHIVES
ATTN DDST
ATTN SPSS

(2 COPIES

(2 COPIES

PAGE 2

BEST AVAILABLE COPY

CHAIRMAN
DEPARTMENT OF DEFENSE EXPLOSION
SAFETY BOARD
RM-GB27C, FORRESTAL BUILDING
WASHINGTON DC 20301
ATTN DD/S+SS

DIRECTOR OF DEFENSE RESEARCH&ENGINEERING
WASHINGTON DC 20301
ATTN AD/SW
ATTN DD/TWP
ATTN DD/S+SS
ATTN AD/NP

COMMANDER
FIELD COMMAND
DEFENSE NUCLEAR AGENCY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117
ATTN FCTA
ATTN FCTA-D

INTERSERVICE NUCLEAR WEAPONS SCHOOL
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117
ATTN TECH LIB

DIRECTOR
JOINT STRATEGIC TARGET
PLANNING STAFF JCS
OFFUTT AIR FORCE BASE
OMAHA, NB 68113
ATTN STINFO LIBRARY

WEAPONS SYSTEMS EVALUATION GROUP
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN DOC CON

BEST AVAILABLE COPY

CHIEF OF RESEARCH, DEVELOPMENT AND
ACQUISITION
DEPARTMENT OF THE ARMY
WASHINGTON DC 20310
ATTN TECHNICAL LIBRARY
ATTN DAMA-CSM-N LTC E. DEBOESER JR

COMMANDER
HARRY DIAMOND LABORATORIES
WASHINGTON, DC 20438
ATTN AMXDO-NP
ATTN AMXDO-TI TECH LIB

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABORATORIES
ABERDEEN PROVING GROUND, MD 21005
ATTN TECH LIB E. BAICY

COMMANDER
U S ARMY COMM COMMAND
FORT HUACHUCA, AZ 85613
ATTN TECHNICAL LIBRARY

COMMANDER
U. S. ARMY MATERIAL & MECHANICS
RESEARCH CENTER
WATERTOWN, MA 02172
ATTN R SHEA

COMMANDER
U S ARMY NUCLEAR AGENCY
FORT BLISS, TX 79916
ATTN TECH LIB

PAGE 4

BEST AVAILABLE COPY

COMMANDER
U S ARMY WEAPONS COMMAND
ROCK ISLAND ARSENAL
ROCK ISLAND, IL 61201
ATTN TECHNICAL LIBRARY

CHIEF OF NAVAL MATERIAL
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20360
ATTN MAT 0323

CHIEF OF NAVAL OPERATIONS
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20350
ATTN OP 03FG
ATTN OP 985F

CHIEF OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ARLINGTON VA 22217
ATTN N PERRONE CD 474
ATTN TECHNICAL LIBRARY

(5 COPIES)

OFFICER IN CHARGE
CIVIL ENGINEERING LABORATORIES
NAVAL CONSTRUCTION BATTALION CENTER
PORT HUENFME CA 93041
ATTN R ODELLO
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
NAVAL ELECTRONIC SYSTEMS COMMAND HQS
WASHINGTON, DC 20360
ATTN PME 117-21A

PAGE 5

BEST AVAILABLE COPY

COMMANDER
NAVAL FACILITIES ENGINEERING COMMAND
HEADQUARTERS
WASHINGTON, DC 20390
ATTN TECHNICAL LIBRARY

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93940
ATTN CODE 2124 TECH RPTS LIBRARIAN

DIRECTOR
NAVAL RESEARCH LABRATORY
WASHINGTON DC 20375
ATTN CODE 2027 TECHNICAL LIBRARY
ATTN CODE 840 J GREGORY
ATTN CODE 8440 F ROSENTHAL
ATTN CODE 8403A G OHARA
ATTN CODE 8442 H HUANG

NKF ENGINEERING ASSOCIATES, INC.
8720 GEORGIA AVENUE
SUITE 803
SILVER SPRING, MD 20910
ATTN. DR. ROBERT O. BELSHEIM

COMMANDER
NAVAL SEA SYSTEMS COMMAND
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362
ATTN ORD - 91313 LIB
ATTN CODE 03511 C POHLER

NAVAL SHIP RESEARCH & DEVELOPMENT CENTER
UNDERSEA EXPLOSIONS RESEARCH DIVISION
PORTSMOUTH VA 23709
ATTN E PALMER
ATTN TECHNICAL LIBRARY

BEST AVAILABLE COPY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362
ATTN NSEC 6120D
ATTN NSEC 6110.01
ATTN NSEC 6105G
ATTN NSEC 6105
ATTN 6105C1
ATTN TECHNICAL LIBRARY

COMMANDER
DAVID W. TAYLOR
NAVAL SHIP RESEARCH & DEVELOPMENT CENTER
BETHESDA MD 20034
ATTN CODE 17 WW MURRAY
ATTN CODE 142-3 LIBRARY
ATTN CODE 174 R SHORT
ATTN CODE 11
ATTN CODE 2740 Y WANG
ATTN CODE 1962
ATTN CODE 1903
ATTN CODE 1731C
ATTN CODE 1171
ATTN CODE 19

COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK
SILVER SPRING MD 20910
ATTN CODE 241 J PETES
ATTN CODE 1224 NAVY NUC PRGMS OFF
ATTN CODE 730 TECH LIB
ATTN CODE 240 H SNAY
ATTN CODE 243 G YOUNG

COMMANDER
NAVAL SURFACE WEAPONS CENTER
DAHLGREN LABORATORY
DAHLGREN VA 22448
ATTN TECHNICAL LIBRARY

PAGE 7

BEST AVAILABLE COPY

COMMANDER
NAVAL UNDERSEA CENTER
SAN DIEGO, CA 92152
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL WEAPONS CENTER
CHINA LAKE CA 93555
ATTN CODE 533 TECH LIB

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE NM 87117
ATTN TECHNICAL LIBRARY

DIRECTOR
STRATEGIC SYSTEMS PROJECTS OFFICE
DEPARTMENT OF THE NAVY
WASHINGTON DC 20376
ATTN NSP-272
ATTN NSP-43 TECH LIBRARY

AIR FORCE CAMBRIDGE RESEARCH
LABORATORIES, AFSC
L.G. HANSCOM FIELD
BEDFORD MA 01730
ATTN SUOL AFCRL RSCH LIB

HEADQUARTERS
AIR FORCE SYSTEMS COMMAND
ANDREWS AIR FORCE BASE
WASHINGTON DC 20331
ATTN TECHNICAL LIBRARY

PAGE 8

BEST AVAILABLE COPY

COMMANDER
ARMAMENT DEVELOPMENT&TEST CENTER
ELGIN AFB FL 32542
ATTN TECHNICAL LIBRARY

LOS ALAMOS SCIENTIFIC LABORATORY
P O BOX 1663
LOS ALAMOS NM 87544
ATTN DOC CONTROL FOR REPORTS LIBRARY

LIVERMORE LABORATORIES
P O BOX 969
LIVERMORE CA 94550
ATTN DOC CON FOR TECH LIBRARY

SANDIA LABORATORIES
P.O. BOX 5800
ALBUQUERQUE NM 87115
ATTN DOC CON FOR 3141 SANDIA RPT COLL

U. S. ENERGY RESEARCH&DEVELOPMENT ADMIN.
DIVISION OF HEADQUARTERS SERVICES
LIBRARY BRANCH G-043
WASHINGTON DC 20545
ATTN DOC CONTROL FOR CLASS TECH LIB

LAWRENCE LIVERMORE LABORATORIES
P.O. BOX 808
LIVERMORE CA 94550
ATTN TECHNICAL LIBRARY

AGRARIAN ASSOCIATES
250 NORTH NASH STREET
EL SUGONDO CA 90245
ATTN M AGBABIAN

BATTELLE MEMORIAL INSTITUTE
505 KING AVENUE
COLUMBUS OH 43201
ATTN TECHNICAL LIBRARY

BELL TELEPHONE LABORATORIES INC.
MOUNTAIN AVE
MURRAY HILL NJ 07974
ATTN TECHNICAL REPORT CENTER

BOEING COMPANY
P.O. BOX 3707
SEATTLE WA 98124
ATTN AEROSPACE LABORATORY

CAMBRIDGE ACOUSTICAL ASSOCIATION
1033 MASSACHUSETTS AVENUE
CAMBRIDGE MA 02138
ATTN M JUNGER

CIVIL / NUCLEAR SYSTEMS CORPORATION
1200 UNIVERSITY N. F.
ALBUQUERQUE NM 87102
ATTN T DUFFY

ELECTRIC BOAT DIVISION
GENERAL DYNAMICS CORPORATION
GROTON CN 06340
ATTN L. CHEN

GENERAL ELECTRIC COMPANY
TEMPO-CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA CA 93102
ATTN DASIAC

PAGE 10

BEST AVAILABLE COPY

ITT RESEARCH INSTITUTE
10 WEST 35TH STREET
CHICAGO IL 60616
ATTN TECHNICAL LIBRARY

INSTITUTE FOR DEFENSE ANALYSIS
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN IDA LIBRARIAN R SMITH

J.L. MERRITT
CONSULTING AND SPECIAL ENGINEERING
SERVICES, INC.
P.O. BOX 1206
REDLANDS CA 92373
ATTN TECHNICAL LIBRARY

KAMAN AVIDYNE
DIV OF KAMAN SCIENCES CORPORATION
83 SECOND AVENUE
NW INDUSTRIAL PARK
BURLINGTON MA 01803
ATTN E CRISCIONE
ATTN TECHNICAL LIBRARY
ATTN G ZARTARIAN

KAMAN SCIENCES CORPORATION
P.O. BOX 7463
COLORADO SPRINGS CO 80933
ATTN TECHNICAL LIBRARY

LOCKHEED MISSILES AND SPACE COMPANY
3251 HANOVER STREET
PALO ALTO CA 94304
ATTN TECH INFO CTR D/COLL
ATTN T GEERS D/52-33 BLDG 205

PAGE 11

BEST AVAILABLE COPY

NATHAN M. NEWMARK
CONSULTING ENGINEERING SERVICES
1114 CIVIL ENGINEERING BUILDING
URBANA IL 61801
ATTN N NEWMARK

POLYTECHNIC INSTITUTE OF NEW YORK
DEPARTMENT OF MECHANICAL AND
AEROSPACE ENGINEERING
333 JAY STREET
BROOKLYN NY 11201
ATTN J KLOSNER

R+D ASSOCIATES
P. O. BOX 9695
MARINA DEL RAY, CA 90291
ATTN TECHNICAL LIBRARY

STANFORD RESEARCH INSTITUTE
333 RAVENSWOOD AVENUE
MENLO PARK CA 94025
ATTN SRT LIB ROOM G021
ATTN B GASTEN
ATTN G ABRAHAMSON

TETRA TECH INC.
630 N ROSEMEAD BLVD
PASADENA CA 91107
ATTN LI-SAN HWANG
ATTN TECH LIB

THE RDM CORPORATION
1920 ALINE AVENUE
VIENNA VA 22180
ATTN TECHNICAL LIBRARY

PAGE 12

BEST AVAILABLE COPY

UNIVERSITY OF MARYLAND
DEPARTMENT OF CIVIL ENGINEERING
COLLEGE PARK MD 20742
ATTN R BERGER

URS RESEARCH COMPANY
155 ROVET ROAD
SAN MATEO CA 94402
ATTN TECHNICAL LIBRARY

ASSISTANT CHIEF FOR TECHNOLOGY
OFFICE OF NAVAL RESEARCH
ARLINGTON, VA 22217
ATTN CODE 200

DR. AZRIEL HARARI/3B 311
NAVAL UNDERWATER SYSTEMS COMMAND
NEWPORT, RI 02840

TELEDYNE BROWN ENGINEERING
MAIL STOP 44
300 SPARKMAN DRIVE
RESEARCH PARK
HUNTSVILLE, AL 35807
ATTN DR. MANU PATEL

DIRECTOR
U.S. ARMY WATERWAYS EXPERIMENT STATION
P.O. BOX 631
VICKSBURG MS 39180
ATTN J STRANGE
ATTN W FLATHAU
ATTN TECH LIB (UNCL ONLY)

PAGE 13

BEST AVAILABLE COPY

AIR FORCE INSTITUTE OF TECHNOLOGY, AU
WRIGHT PATTERSON AFB, OH 45433
ATTN LIB AFIT BLDG 640 AREA B (UNCL ONLY)

WEIDLINGER ASSOCIATES
3000 SAND HILL ROAD
BUILDING 4 SUITE 245
MENLO PARK CA 94025
ATTN J. ISENBERG

WEIDLINGER ASSOCIATES
110 EAST 59TH STREET
NEW YORK, NY 10022
ATTN DR. M. L. BARON

(5 COPIES

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <u>19 TR-</u> Technical Report No. <u>21</u>	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Transient Response of Shells with Internally Attached Structures.		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER Technical Report No. 21
7. AUTHOR(s) <u>Dr. D. Ranlet and F.L. DiMaggio</u>	8. CONTRACT OR GRANT NUMBER(s) <u>N00014-72-C-0119</u>	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Weidlinger Associates 110 East 59th Street New York, New York 10022	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61153N44023-03 064464	
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research 800 North Quincy Street Arlington, Virginia 22217	12. REPORT DATE <u>August 1977</u>	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) <u>12 25p.</u>	13. NUMBER OF PAGES 22	
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Transient Response Substructuring Shell Response Internal Structure Submerged Shell		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Equations of motion are derived for the transient response, to a shock wave, of a submerged shell with internal structures. A substructuring procedure, which does not require calculation of a system stiffness matrix, is employed to obtain these equations in a general manner for arbitrary internal structures approximated by finite elements.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6001

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

373 050

4/B